


**DESCRIPTION**

- Simple three-speed control handle
- Casting pump, return oil device and safety relief valve
- Strengthen the frame with high balance
- The descending speed is controllable and slow
- Optional wheel: nylon wheel, polyurethane wheel, steel wheel
- Special requirements can be met through negotiation
- The rated load has been raised 5000 times without deformation



**MODEL: CYB 2500**

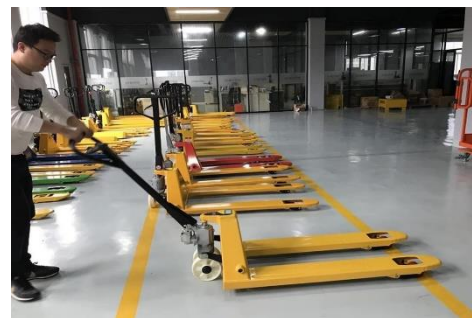

**TECHNICAL PARAMETERS**

<b>Xe nâng tay thấp Fujifa / Item / Type</b>	<b>5T cồng hẹp</b>	<b>5T cồng rộng</b>
Thương hiệu / brand	Fujifa	Fujifa
Tải trọng nâng / Capacity (kg)	5000	5000
Chiều cao nâng tối đa / Max Fork Height (mm)	200	200
Chiều cao nâng tối thiểu / Min.Height (mm)	80	80
Kích thước bánh trước / Front wheel diameter (mm)	70 * 80	70 * 80
Kích thước bánh lái / Rear wheel diameter (mm)	50 * 180	50 * 180
Chiều dài cồng nâng / Overall Height (mm)	1150	1220
Chiều rộng cồng nâng / Overall Width (mm)	550	685
Công nghệ / Technology	Nhật Bản / Japan	Nhật Bản / Japan